
Bulletin	UK	Export	Issued
1409	YES	YES	04/06/2019

New – CEJN WEO hydraulic hose inserts and accessories





Vapormatic is pleased to announce the addition of CEJN WEO Plug-In hydraulic hose fittings and associated accessories to its hydraulic fittings portfolio.

CEJN WEO fittings have multiple applications. In agriculture these fittings are commonly used on Quicke/Massey Ferguson type front loaders but other applications include forestry and forklifts. WEO couplings are:

- Ideal when space is limited.
- Click to connect by hand. No tools required which often cannot easily be used.
- Able to eliminate untightening, oil leaks and follow up tightening.


The crimp inserts have been tested and approved for use with Vapormatic R2AT, 2SC and 2SC+ hoses and Vapormatic ferrules at our published swage diameters.

Please see details of our full range below:

Illustration	Product image	Description	Vapormatic Part Number	CEJN Part Number	Pack Quantity	Hose Type			
						R2AT		2SC/2SC+	
						Ferrule	Swage Dia	Ferrule	Swage Dia
1		Stop Assembly 1/4"	VFR7111	147490400	10				
1		Stop Assembly 3/8"	VFR7110	147490600	10				
1		Stop Assembly 1/2"	VFR7109	147490801	10				
2		Release Ring 1/4"	VFR7103	147480400	10				
2		Release Ring 3/8"	VFR7104	147480600	10				
2		Release Ring 1/2"	VFR7112	147480800	10				
3		Crimp Fitting WEO 1/4" x 1/4" Hose*	VFR7108	147100404	2	VFR9252	18.6	VFR9262	17.7
3		Crimp Fitting WEO 3/8" x 3/8" Hose*	VFR7107	147100606	2	VFR9253	21.2	VFR9263	21.4
3		Crimp Fitting WEO 1/2" x 3/8" Hose*	VFR7105	147100806	2	VFR9253	21.2	VFR9263	21.4
3		Crimp Fitting WEO 1/2" x 1/2" Hose*	VFR7106	147100808	2	VFR9224	24	VFR9264	25
4		Seal Kit 1/4"	VFR7100	148470400	10				
4		Seal Kit 3/8"	VFR7101	148470600	10				
4		Seal Kit 1/2"	VFR7102	148470800	10				
* Crimp fittings not supplied with ferrules. Please order ferrule for relevant hose separately.									

New Product Update & Parts Information

Bulletin	UK	Export	Issued
1409	YES	YES	04/06/2019

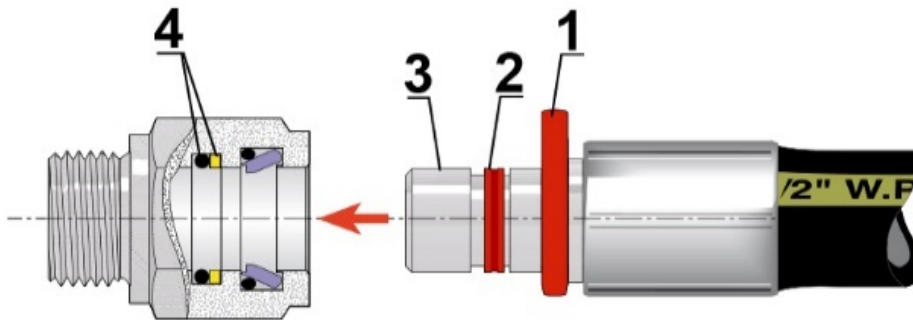

1. Assembly stop
2. Release ring
3. Hose insert/fitting to swage (Ferrule not included)
4. Seal Kit

Please note:

- Swage dimensions have been established using exclusively Vapormatic hose and fittings.
- The recommended swage dimensions shown are intended as a guide. It is essential to ensure the correct insert collapse is obtained. WEO crimp fittings require 0.1mm to 0.25mm internal collapse.
- Components from different manufacturers or distributors should not be combined to create hose assemblies, this may result in failure of the assembly.

Please see our full hydraulic hose, fittings and equipment portfolio at www.vapormatic.co.uk or in our printed catalogue PEA0016.

All Vapormatic quality replacement parts carry an industry leading **12 month parts and labour warranty**. For further information on specific items please visit www.vapormatic.com

